

# SPRINKLER ACCESSORIES

## SWING PIPE

### FEATURES

- Inside diameter: .49"
- 100' (30,0 m) stackable coils, marked in 12" increments

### SPC-100 - HIGH-PRESSURE SWING PIPE

- Engineered for high pressures, up to 150 psi
- Quick and easy installation

### SPCX-100 - SUPER FLEX SWING PIPE

- Contractor-preferred maximum flexibility without kinking
- Textured surface is easy to grip even when wet
- Engineered for pressures up to 80 psi



### MODELS

- SPC-10** High-Pressure Swing Pipe  
**SPCX-100** Super Flex Swing Pipe

## SWING ASSEMBLIES

### FEATURES

- Marlex™ ells can be adjusted to virtually any configuration, leak free
- "3L" configuration has a Marlex™ ell on one end – ideal for use with horizontally mounted tees
- "4L" configuration has Marlex™ ells on both ends for maximum versatility with vertically mounted tees
- High pressure tested to over 100 PSI

### MODELS

Model	Length	Inlet/Outlet
<b>SPSA-65050-3L</b>	6"	1/2" x 1/2"
<b>SPSA-65075-3L</b>	6"	1/2" x 3/4"
<b>SPSA-125050-3L</b>	12"	1/2" x 1/2"
<b>SPSA-125075-3L</b>	12"	1/2" x 3/4"
<b>SPSA-127575-3L</b>	12"	3/4" x 3/4"
<b>SPSA-65050-4L</b>	6"	1/2" x 1/2"
<b>SPSA-65075-4L</b>	6"	1/2" x 3/4"
<b>SPSA-125050-4L</b>	12"	1/2" x 1/2"
<b>SPSA-125075-4L</b>	12"	1/2" x 3/4"
<b>SPSA-127575-4L</b>	12"	3/4" x 3/4"



\*Spray not included


## FITTINGS

### FEATURES

- Easy twist-in insertion without use of glue or clamps
- Multiple barbs – prevents barb blow-out
- Hard acetal thermoplastic for sharper barbs

### MODELS

- SASB-COUP** 1/2" Barb x 1/2" Barb Coupling  
**SASBA-050** 1/2" (15/21) M NPT x 1/2" Barb Adapter  
**SASBA-075** 3/4" (20/27) M NPT x 1/2" Barb Adapter  
**SASB-ELBOW-050** 1/2" (15/21) M NPT x 1/2" Barb Elbow  
**SASB-ELBOW-075** 3/4" (20/27) M NPT x 1/2" Barb Elbow  
**SASB-TEE** 1/2" Barb x 1/2" Barb Tee

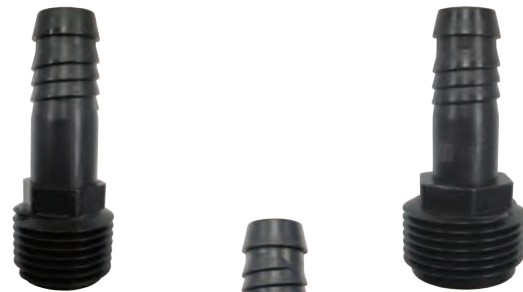

SASBA-050

SASBA-075



SASB-TEE



SASB-COUP



SASB-ELBOW-050



SASB-ELBOW-075

DOWNLOAD TECH SPECS AT:  
[www.salcodrip.com](http://www.salcodrip.com)